
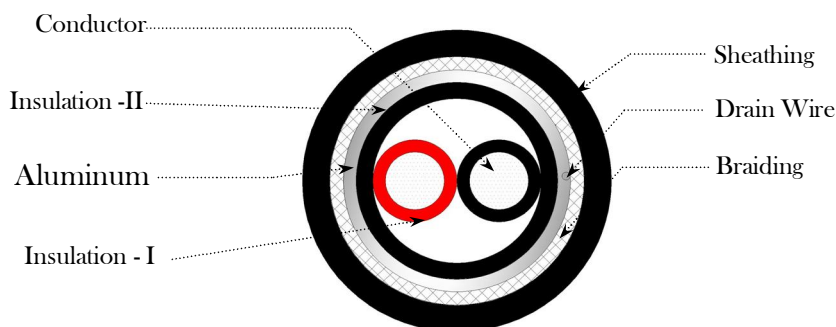


ITEM CODE - SHLD123

22 AWG 1-PAIR SCREENED SPECIAL DMX CABLE

- Exactly According to Specification of **AVOLIGHT & GRANDMA.**
- ✦ 22 AWG 1 Pair 100% Tinned Copper Screened DMX Cable For Stage / Theater Lighting.

CONSTRUCTION	
Center Conductor	: 22 AWG, 7/0.254 mm Annealed Tinned Copper.
Insulation - I ST	: P.P
Insulation - II ND	: Soft PVC
Core Colour	: Red, Black
Screening - I ST	: Banded Aluminum Foil With 100 % Coverage.
Drain Wire	: 7/0.20 mm ATC
Screening - II ND	: 90 % (Nom) Coverage. ATC
Outer Jacket	: Soft PVC
Outer Jacket Colour	: Black / As Per Customer
Printing	: Falcon RoHS DMX 100% Screened Cable
DIAMETERS	
Center Conductor	: 7/0.254 ± 0.005 mm
Insulation - I ST	: 1.20 ± 0.05 mm
Insulation - II nd	: 3.5 ± 0.10 mm
Outer Jacket Diameter	: 5.50 ± 0.50 mm
Length / Coil	: 100 Mtrs / As Per Customer
ELECTRICAL	
DC Resistance (Max.) At 20°C	: 56.80 Ω-km
Temperature	: -15° to 70°Celsius
Insulation Resistance (Min.) At 20°C	: 5000 M Ω-km

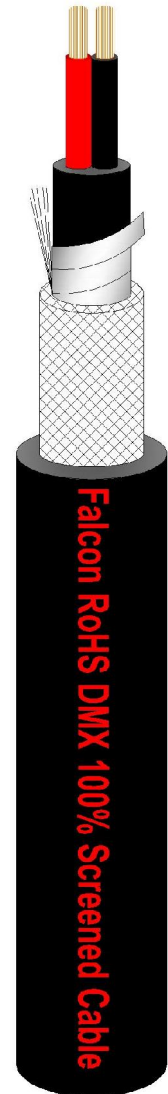

ISSUE	Prepared By	Approved By
No. 01.		