
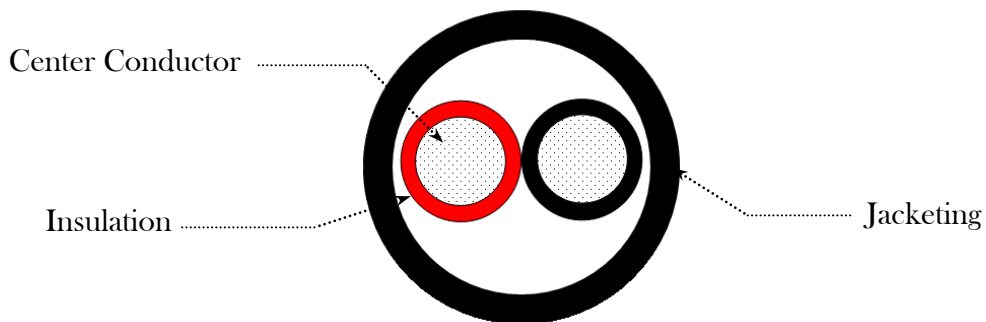


**(19 AWG) ATC 2/CORE TWISTED ROUND FLEXIBLE SPEAKER CABLE**

CONSTRUCTION	
Center Conductor	: 19 AWG, 24/0.20 mm Annealed Tinned Copper.
Insulation	: PVC L/F
Colour	: Red, Black
Outer Jacket	: Soft PVC L/F
Outer Colour	: As Per Customer
DIAMETERS	
Center Conductor	: 24/0.20 ± 0.003 mm
Insulation	: 2.00 ± 0.10 mm
Jacketing	: 6.00 ± 0.20 mm
Length / Coil	: 100 Mtrs. / As Per Customer
ELECTRICAL	
DC Resistance (Max.) At 20°C	: 26.72 Ω-km
Temperature	: -15° to 70° Celsius
Insulation Resistance Const.(Min.) At 27°C	: 36.7 MΩ-km

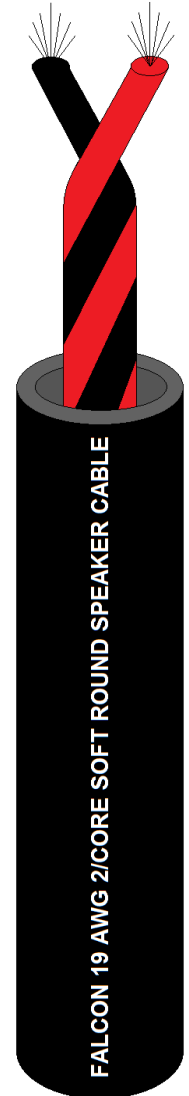

ISSUE No. 01. DATE :- 24-02-2022	Prepared By : R	Approved By : L.K
-------------------------------------	--------------------	----------------------