
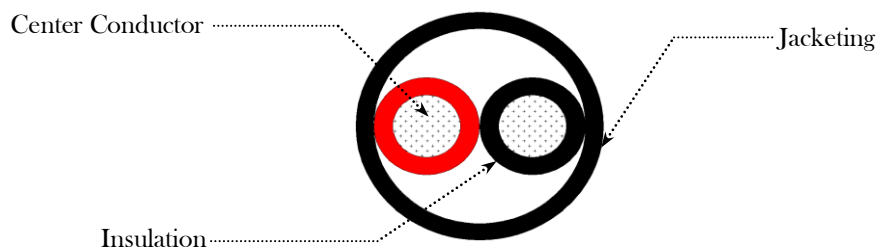


ROND:-230

1.0 SQMM 2/CORE ROUND SPEAKER CABLE

CONSTRUCTION	
Center Conductor	: 18 AWG, 32/0.20 mm Annealed Tinned Copper.
Insulation	: PVC
Outer Jacket	: PVC / As Per Customer
DIMETERS	
Center Conductor	: 32/.020 mm
Insulation	: 2.50 ± 0.05 mm
Jacketing	: 6.20 ± 0.20 mm
ELECTRICAL	
DC Resistance (Max.) At 20°C	: 20.04 Ω-km
Temperature	: -15° to 70° Celsius
Insulation Resistance Const.(Min.) At 27°C	: 36.7 M Ω-km

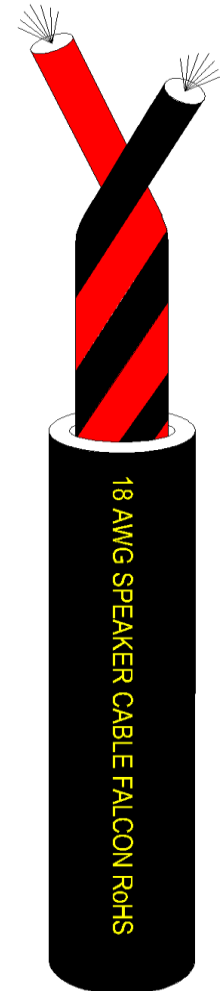

ISSUE No. 01. DATE :- 28.07.2022	Prepared By : R	Approved By : L.K
-------------------------------------	--------------------	----------------------