
<u>FLAT - 105</u>



70/36 ATC (14 AWG) 2/CORE PARALLEL TRANSPARENT SPEAKER CABLE

CONSTRUCTION				
Center Conductor	:	14 AWG, 70/0.193 mm Annealed Tinned Copper.		\$
Outer Jacket	:	Transparent PVC		
Jacketing Colour	:	As Per Customer	ABLE	
DIAMETERS			14 AWG PURE COPPER SPEAKER CABLE	
Center Conductor	:	$70/0.193 \pm 0.003 \text{ mm}$	SPEA	
Jacketing	:	$3.80 \text{ x } 7.80 \pm 0.20 \text{ mm}$	OPPER	
Length / Coil	:	100 Mtrs. / As Per Customer		
ELECTRICAL			MG PI	
DC Resistance (Max.) At 20°C	:	9.37 Ω- km	14 A	
Temperature	:	-15° to 70°Celsius		

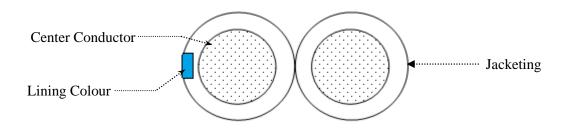

ISSUE No. 01.Prepared By :ApprovDATE :- 09.02.2022RahulLalan	
--	--